


Anwendung / Application



1P PCIe Parallel SPP/EPP/ECP Karte (MosChip Chip-Set)

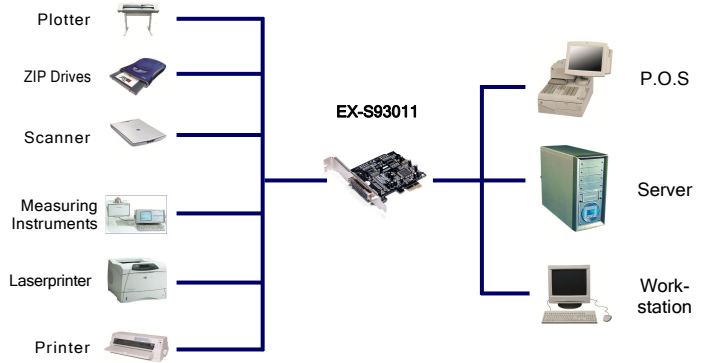

1P PCIe Parallel SPP/EPP/ECP Board (MosChip Chip-Set)

Beschreibung

Die EX-S93011 PCI-Express Parallel Karte stellt einen Parallelen SPP/EPP/ECP High Performance Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Parallelen Ausgang für PC, kleine Workstation oder Server über den PCI-Express Bus zu erweitern. Mit der EX-S93011 haben Sie keine IRQ und I/O-Adressen Probleme weil sie voll PCI-Express Plug-and-Play-Kompatibel ist.

Description

The EX-S93011 PCI parallel adapter provides one SPP/EPP/ECP high performance port. It is designed for PC, thin client or server to provide instant LPT port expansion via the PCI-Express Bus. The card is fully Universal PCI Plug-and-Play compatible and there are no IRQ and I/O address configuration problems.

Merkmale

- PCI-Express x1 Parallel Karte mit einem Anschluss
- Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port) ECP (Enhanced Capacity Port)
- I/O Adressen und Interrupt wird vom Betriebs System vergeben, IRQ Sharing
- PCI-Express Schnittstelle kompatibel zu Rev. 1.0a Spezifikation
- Windows WHQL zertifiziert

Features

- PCI-Express x1 Parallel card with one port
- Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port) ECP (Enhanced Capacity Port)
- I/O addresses and Interrupt setting from the operating system, IRQ sharing
- Fully compliant with PCI-Express Base Specification Rev. 1.0a
- Windows WHQL certification

Spezifikationen

- **Chip-Set:** MosChip
- **Datentransfer-Rate:** 2Mbyte/Sek.
- **Anschlüsse:** 1 x 25 Pin D-SUB Parallel Buchse
- **Hardwaresysteme:** PCI-Express Slot x1 bis x16
- **Treiber:** Win XP/ Vista/ 7/ 8/ Server (200x) (32&64) WinCE, Linux
- **Betriebstemperatur :** 0⁰ bis 55⁰ Celsius
- **Lagertemperatur:** -40⁰ bis 75⁰ Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 3,3 Volt über PCI-Express Slot
- **Abmessung:** 65 x 58 mm
- **Gewicht:** 200g
- **Lieferumfang:** EX-S93011, Treiber CD, Handbuch

Specifications

- **Chip-Set:** MosChip
- **Data transfer rate:** 2Mbyte/Sec.
- **Connectors:** 1 x 25 pin D-SUB female connector
- **Hardware system:** PCI-Express Slot x1 to x16
- **Driver:** Win XP/ Vista/ 7/ 8/ Server (200x) (32&64) WinCE, Linux
- **Operating Temperature :** 32⁰ up to 131⁰ Fahrenheit
- **Storage Temperature:** -40⁰ up to 167⁰ Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 3.3 Volt via PCI-express slot
- **Size:** 65 x 58 mm
- **Weight:** 200g
- **Packaging contents:** EX-S93011, Driver CD, Manual

System / OS



Geprüft / Approved



Verpackung / Packaging

