



Bild / Picture

Anwendung / Application

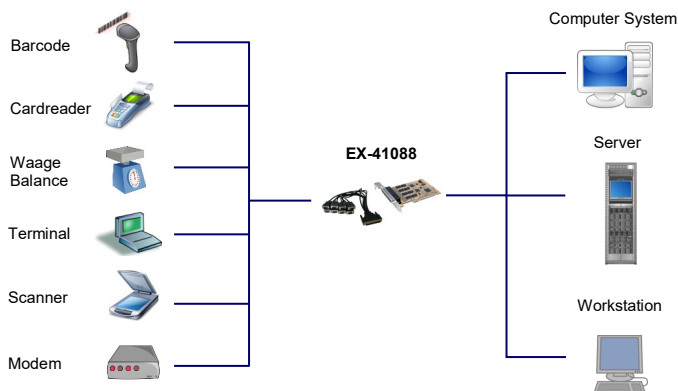

8S Seriell RS-232 PCI Karte (FTDI Chip-Set)

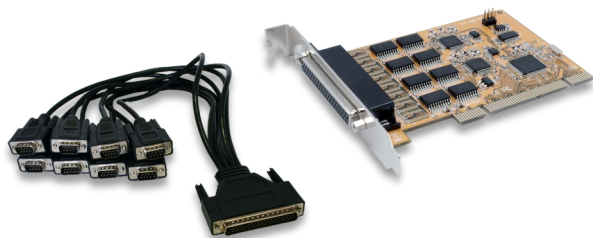

8S Serial RS-232 PCI card (FTDI Chip-Set)

Beschreibung

Die EX-41088 PCI I/O Karte stellt acht serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Sie ist entwickelt worden um acht weiteren Seriellen Ports für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. Die Karte ist voll Plug-and-Play kompatibel. Das Octopus Kabel wird mitgeliefert.

Description

The EX-41088 PCI I/O adapter provides eight high performance 16C550-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible. The Octopus cable is included.

Merkmale

- Schnittstelle: RS-232 V.24
- ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's
- FIFO Buffer: 16C550 mit 16Byte
- I/O Adressen und Interrupt: werden vom Betriebs System vergeben
- Daten Bits: 7 und 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Features

- Interface: RS-232 V.24
- ±15kV IEC1000-4-2 ESD protection for RS232 I/O's
- FIFO Buffer: 16C550 with 16Byte
- I/O addresses and Interrupt: Set from the operating system
- Data Bits: 7 and 8
- Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Spezifikation

- **Chip-Set:** FTDI
- **Datentransfer-Rate:** 300 Baud bis 921.6KBaud
- **Anschlüsse:** 1 x 63 Pin Buchse
8 x 9 Pin Seriell RS-232 Stecker (Octopus Kabel)
- **Hardwaresysteme:** PCI und PCI-X 32-Bit Slot
- **Treiber:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)
WinCE/ Linux/ Mac OS 10.x
- **Betriebstemperatur :** 0°C bis 55° Celsius
- **Lagertemperatur:** -40°C bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 3.3V oder 5Volt über den PCI-Slot
- **Abmessung:** 122.00 x 80.00 mm
- **Gewicht:** 550g
- **Lieferumfang:** EX-41088, 1 x Octopus Kabel, Treiber CD, Handbuch

Specification

- **Chip-Set:** FTDI
- **Data transfer rate:** 300 Baud up to 921.6KBaud
- **Connectors:** 1 x 63 Pin female connector
8 x 9 pin serial RS-232 male connector (Octopus cable)
- **Hardware system:** USB 1.1, 2.0 or 3.0 ports
- **Driver:** Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit)
WinCE/ Linux/ Mac OS 10.x
- **Operating Temperature :** 32°F up to 131° Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 3.3V or 5V over the PCI-Slot
- **Size:** 122.00 x 80.00 mm
- **Weight:** 550g
- **Packaging contents:** EX-41088, 1 x Octopus cable, Driver CD, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging

